


Continental Eagle
**CENTRIFUGAL
 LINT CLEANER**




The **CENTRIFUGAL LINT CLEANER** is a flow-through (air-jet type) lint cleaner. Ginned lint is conveyed by air into the cleaner through a constricting duct at a relatively high velocity.

Air and cotton moving through the inlet duct make an abrupt change in direction as they pass across an adjustable mote opening. The heavier trash is ejected through the opening by inertial forces while lint is carried through the cleaner by the airstream.

The amount of trash removed is controlled by the size of the adjustable mote opening. This opening can be adjusted during operation by a handwheel on the exterior of the machine. An external graduated scale having numbers 0 through 10 provides an adjustment reference point. Ejection of trash can be observed through a window on each end or through the door on the front. In the event of a tag forming in the constricting duct, a lever is provided on top of the cleaner to quickly move the mote opening to the full open position.

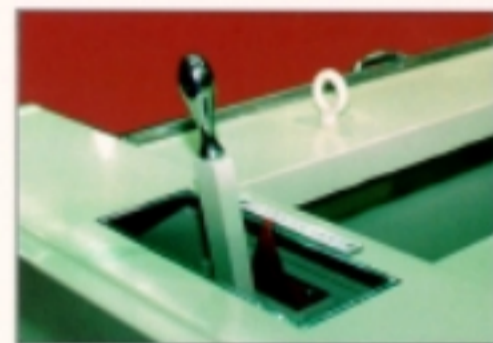

Variable set mote opening control

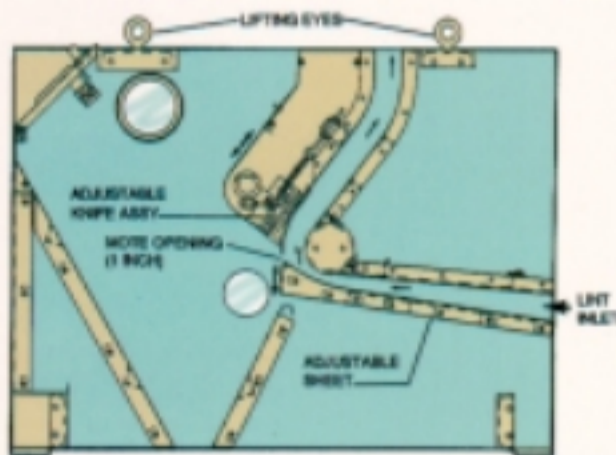

Technical Specifications

Discharge Vacuum.....	2 in. (51 mm) WG-NEG
Air Velocity.....	12,000 ft./min. (3658 m/min)
Mote Opening.....	Variable, set 1 inch (25.4 mm) at factory
Principal Dimensions:	
Length:	
Inside.....	96 in. (2438 mm)
Overall.....	120 in. (3048 mm)
Width.....	62-1/8 in. (1578 mm)
Height.....	45-1/2 in. (1156 mm)
Weight.....	2500 lb. (1134 Kg)

ALL DESIGNS, SPECIFICATIONS AND RATINGS ARE SUBJECT TO CHANGE WITHOUT NOTICE ©1965 Continental Eagle Corporation

Manufactured and Marketed by



BAJAJ STEEL INDUSTRIES LIMITED

IMAMBADA ROAD, NAGPUR- 440 018, INDIA
 Tel: +91-712-272 0071 ~ 80 Fax: +91-712-272 8050 / 272 3068
 email : cecsales@bajajngp.com / bsi@bajajngp.com
 website : www.bajajngp.com



Telephone: (334) 365-8811 • Fax: (334) 361-7627
 Web Site: www.coneagle.com